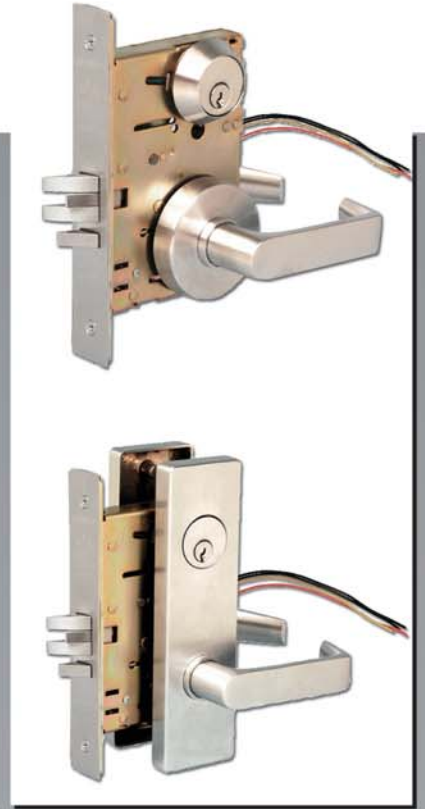


# ELECTRIFIED MORTISE LOCK



• MS COMMERCIAL • ELECTRIFIED MORTISE LOCK • [www.townsteel.com](http://www.townsteel.com)

**MS COMMERCIAL**  
**ELECTRIFIED MORTISE**

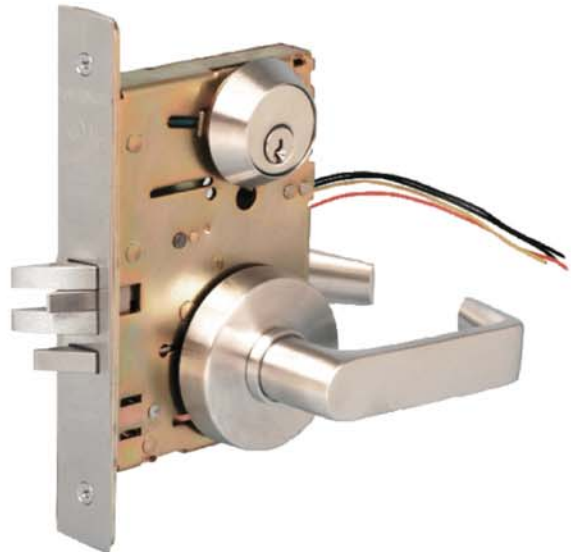
**LOCK**

## Electrified Mortise Lock

TownSteel Electrified Mortise Locks are designed to handle single opening, stand alone applications, or can be readily integrated into sophisticated access control systems. They meet ANSI A156.13 Grade 1 requirements, and are UL listed.



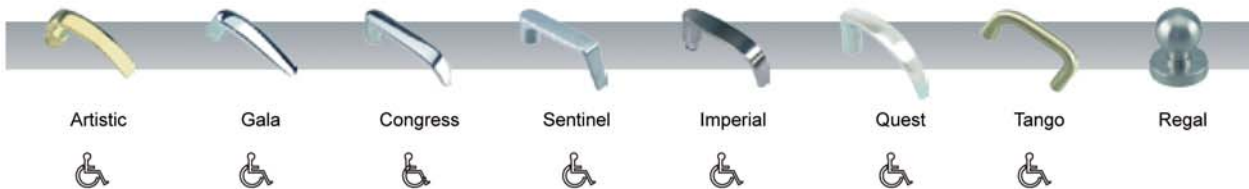
MSE



MSS

Note: Available with I.C and security cylinder

### Available Levers



ANSI/BHMA CERTIFIED GRADE 1 MORTISE LOCKSET  
 UL & ULC LISTED 3-HOUR FIRE RATING

## Electrified Mortise Lock

### Features

- 24VDC or 12VDC voltage
- Handing field reversible
- 3 Monitoring capabilities
  - UL listed 3-hour fire rating
  - Meets or exceeds ANSI grade 1 standards
- For new or retrofit applications
- Heavy-duty mortise lock
  - UL listed 3-hour fire rating
  - Meets or exceeds ANSI grade 1 standards
- Forged brass or stainless steel escutcheon
- 7 Solid-touch grip levers and knob to choose from
  - Levers made of forged brass or stainless steel
  - Grade 1 knob with steel insert
- Easy installation, easy servicing
- 3-year manufacturer's warranty










### Available Finishes

US3(605)	US4(606)	US10(612)	US10B(613)	US26(625)	US26D(626)	US32(629)	US32D(630)
Bright Brass	Satin Brass	Satin Bronze	Oil Rubbed Bronze	Bright Chrome	Satin Chrome	Bright SST	Satin SST

How To Order					
1.Trim	MSS (Sectional), MSE (Escutcheon)				Order # Example:  <p style="text-align: center;"><b><u>MSS-121-S-626-LH</u></b></p> 1. Sectional Regular _____ MSS 2. Function _____ 121 3. Sentinel Lever _____ S 4. Satin Chrome _____ 626 5. Left Handed _____ LH
2.Function	Please refer to function sheet				
3.Lever	Please refer to lever listing				
4.Finish	Please refer to finish listing				
5.Handing	RH	LH	RHR	LHR	








# MS Series Mortise Lock with **Electrified** Mortise Chassis

## Functions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		MSS-121 MSE-121	12VDC Fail Safe, 3-position monitoring	N/A	12VDC voltage, fail safe, Monitors Request-to-Exit, Door Position Status and Latch Position Status. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, latch bolt can be retracted by key or lever on inside. Auxiliary latch bolt.
		MSS-122 MSE-122	12VDC Fail Secure 3-position monitoring	N/A	12VDC voltage, fail secure, Monitors Request-to-Exit, Door Position Status and Latch Position Status. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. When locked, latch bolt can be retracted by key or lever on inside. Auxiliary latch bolt.
		MSS-121C MSE-121C	12VDC Fail Safe RQE	N/A	12VDC , fail safe. Monitors request to exit (RQE). Latch bolt is operated by lever from either side when no power is applied. When power is applied levers are inoperative (locked) on both sides. When locked the latch bolt can be retracted by key on either side. Auxiliary latch bolt.
		MSS-122C MSE-122C	12VDC Fail Secure RQE	N/A	12VDC , fail secure. Monitors request to exit (RQE). Powered unit is unlocked and latch bolt is operated by lever on either side. When no power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Auxiliary latch bolt.
		MSS-121DB MSE-121DB	12VDC Fail Safe Dead Bolt RQE	N/A	12VDC voltage, fail safe, with Dead Bolt, Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, latch bolt can be retracted by key or lever on inside. Rotating inside lever retracts both bolts. Auxiliary latch bolt.
		MSS-122DB MSE-122DB	12VDC Fail Secure Dead Bolt RQE	N/A	12VDC voltage, fail secure, with Dead Bolt, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, latch bolt can be retracted by key or lever on inside. Rotating inside lever retracts both bolts. Auxiliary latch bolt.
		MSS-121DC MSE-121DC	12VDC Fail Safe Dead Bolt RQE	N/A	12VDC , fail safe with dead bolt. Monitors request to exit (RQE). Latch bolt is operated by lever from either side when no power is applied. When power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Dead bolt can be operated on both sides by key. When unlocked, operating inside or outside lever retracts both bolts. Auxiliary latch bolt.







# MS Series Mortise Lock with **Electrified** Mortise Chassis

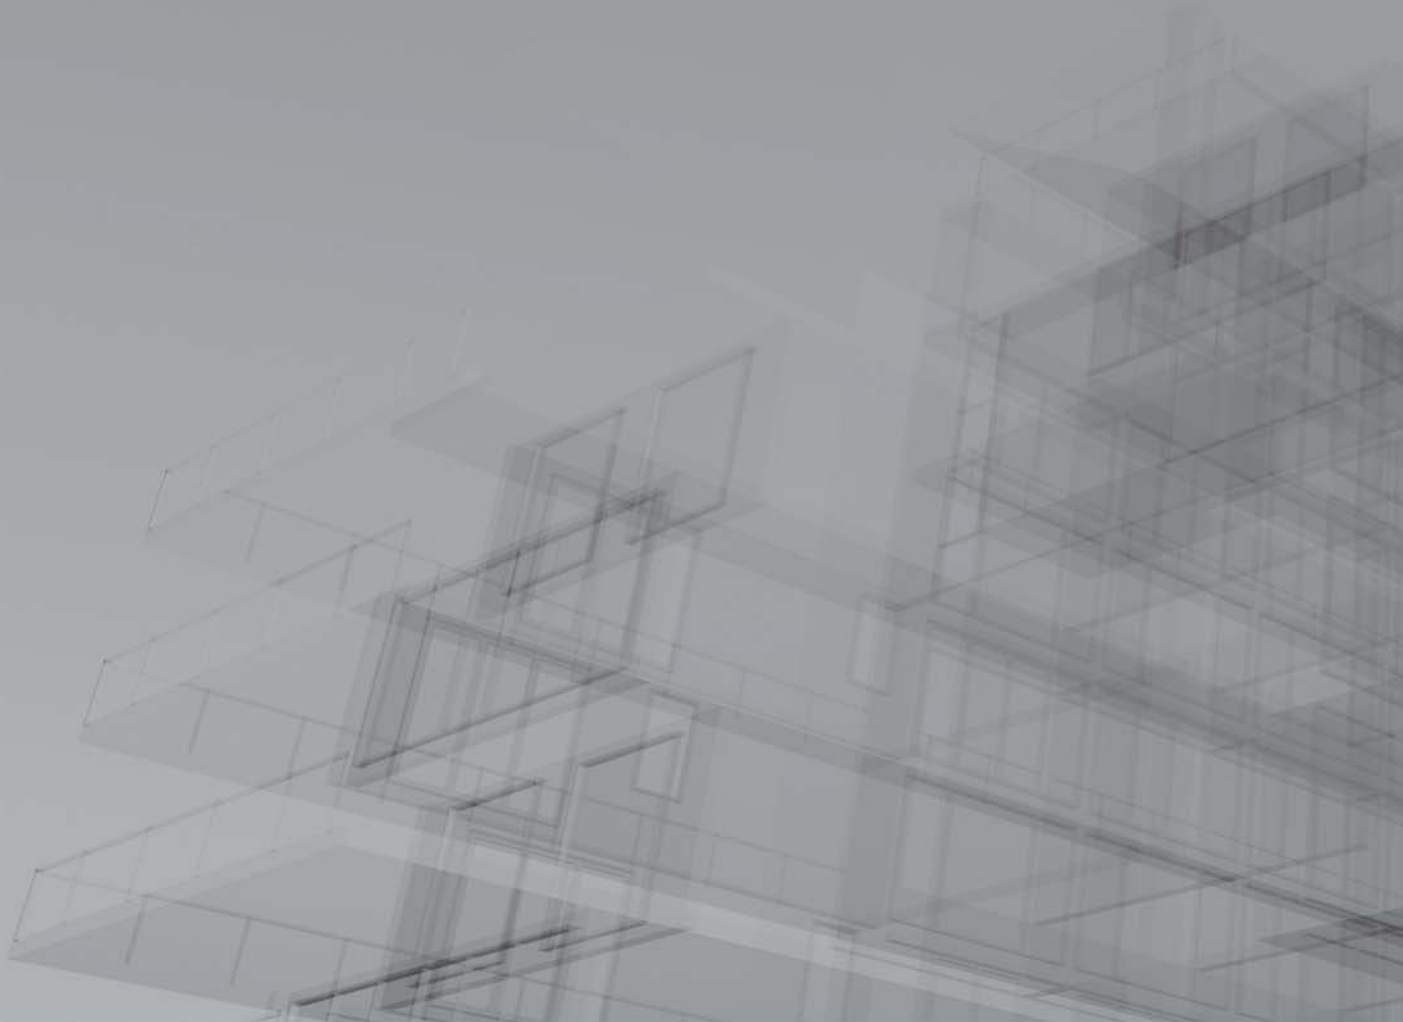
## Functions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		MSS-122DC MSE-122DC	12VDC Fail Secure Dead Bolt RQE	N/A	12VDC , fail secure with dead bolt. Monitors request to exit (RQE). Powered unit is unlocked and latch bolt is operated by lever on either side. When no power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Dead bolt can be operated on both sides by key. When unlocked, operating inside or outside lever retracts both bolts. Auxiliary latch bolt.
		MSS-121RQE MSE-121RQE	12VDC Fail Safe RQE	N/A	12VDC voltage, fail safe, Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, latch bolt can be retracted by key from outside or lever on inside. Auxiliary latch bolt.
		MSS-122RQE MSE-122RQE	12VDC Fail Secure RQE	N/A	12VDC voltage, fail secure, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied, outside lever is locked. When locked, latch bolt can be retracted by key from outside or lever on inside. Auxiliary latch bolt.
		MSS-241 MSE-241	24VDC Fail Safe 3-position monitoring	N/A	24VDC, fail safe, Monitors Request-to-Exit, Door Position Status and Latch Position Status. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, the latch bolt can be retracted by key or lever on inside. Auxiliary latch bolt.
		MSS-242 MSE-242	24VDC Fail Secure 3-position monitoring	N/A	24VDC, fail secure, Monitors Request-to-Exit, Door Position Status and Latch Position Status. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. When locked, latch bolt can be retracted by key or lever on inside. Auxiliary latch bolt.
		MSS-241C MSE-241C	24VDC Fail Safe RQE	N/A	24VDC , fail safe. Monitors request to exit (RQE). Latch bolt is operated by lever from either side when no power is applied. When power is applied levers are inoperative (locked) on both sides. When locked the latch bolt can be retracted by key on either side. Auxiliary latch bolt.
		MSS-242C MSE-242C	24VDC Fail Secure RQE	N/A	24VDC , fail secure. Monitors request to exit (RQE). Powered unit is unlocked and latch bolt is operated by lever on either side. When no power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Auxiliary latch bolt.

# MS Series Mortise Lock with **Electrified** Mortise Chassis

## Functions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		MSS-241DB MSE-241DB	24VDC Fail Safe Dead Bolt RQE	N/A	24VDC voltage, fail safe, with Dead Bolt, Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, latch bolt can be retracted by key or lever on inside. Rotating inside lever retracts both bolts. Auxiliary latch bolt.
		MSS-242DB MSE-242DB	24VDC Fail Secure Dead Bolt RQE	N/A	24VDC voltage, fail secure, with Dead Bolt, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, latch bolt can be retracted by key or lever on inside. Rotating inside lever retracts both bolts. Auxiliary latch bolt.
		MSS-241DC MSE-241DC	24VDC Fail Safe Dead Bolt RQE	N/A	24VDC , fail safe with dead bolt. Monitors request to exit (RQE). Latch bolt is operated by lever from either side when no power is applied. When power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Dead bolt can be operated on both sides by key. When unlocked, operating inside or outside lever retracts both bolts. Auxiliary latch bolt.
		MSS-242DC MSE-242DC	24VDC Fail Secure Dead Bolt RQE	N/A	24VDC , fail secure with dead bolt. Monitors request to exit (RQE). Powered unit is unlocked and latch bolt is operated by lever on either side. When no power is applied levers are inoperative (locked) on both sides. When locked, the latch bolt can be retracted by key on either side. Dead bolt can be operated on both sides by key. When unlocked, operating inside or outside lever retracts both bolts. Auxiliary latch bolt.
		MSS-241RQE MSE-241RQE	24VDC Fail Safe RQE	N/A	24VDC voltage, fail safe, Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, latch bolt can be retracted by key from outside or lever on inside. Auxiliary latch bolt.
		MSS-242RQE MSE-242RQE	24VDC Fail Secure RQE	N/A	24VDC voltage, fail secure, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied, outside lever is locked. When locked, latch bolt can be retracted by key from outside or lever on inside. Auxiliary latch bolt.



## **TownSteel Inc.**

17901 Railroad Street, City of Industry, CA 91748

Toll Free: (877) 858-0888

Tel: (626) 965-8917

Fax: (626) 965-8919

[sales@townsteel.com](mailto:sales@townsteel.com)